




iPhone 6 Plus Lightning Connector and Headphone Jack Cable Replacement

Prereq only for rear case.

Written By: Walter Galan

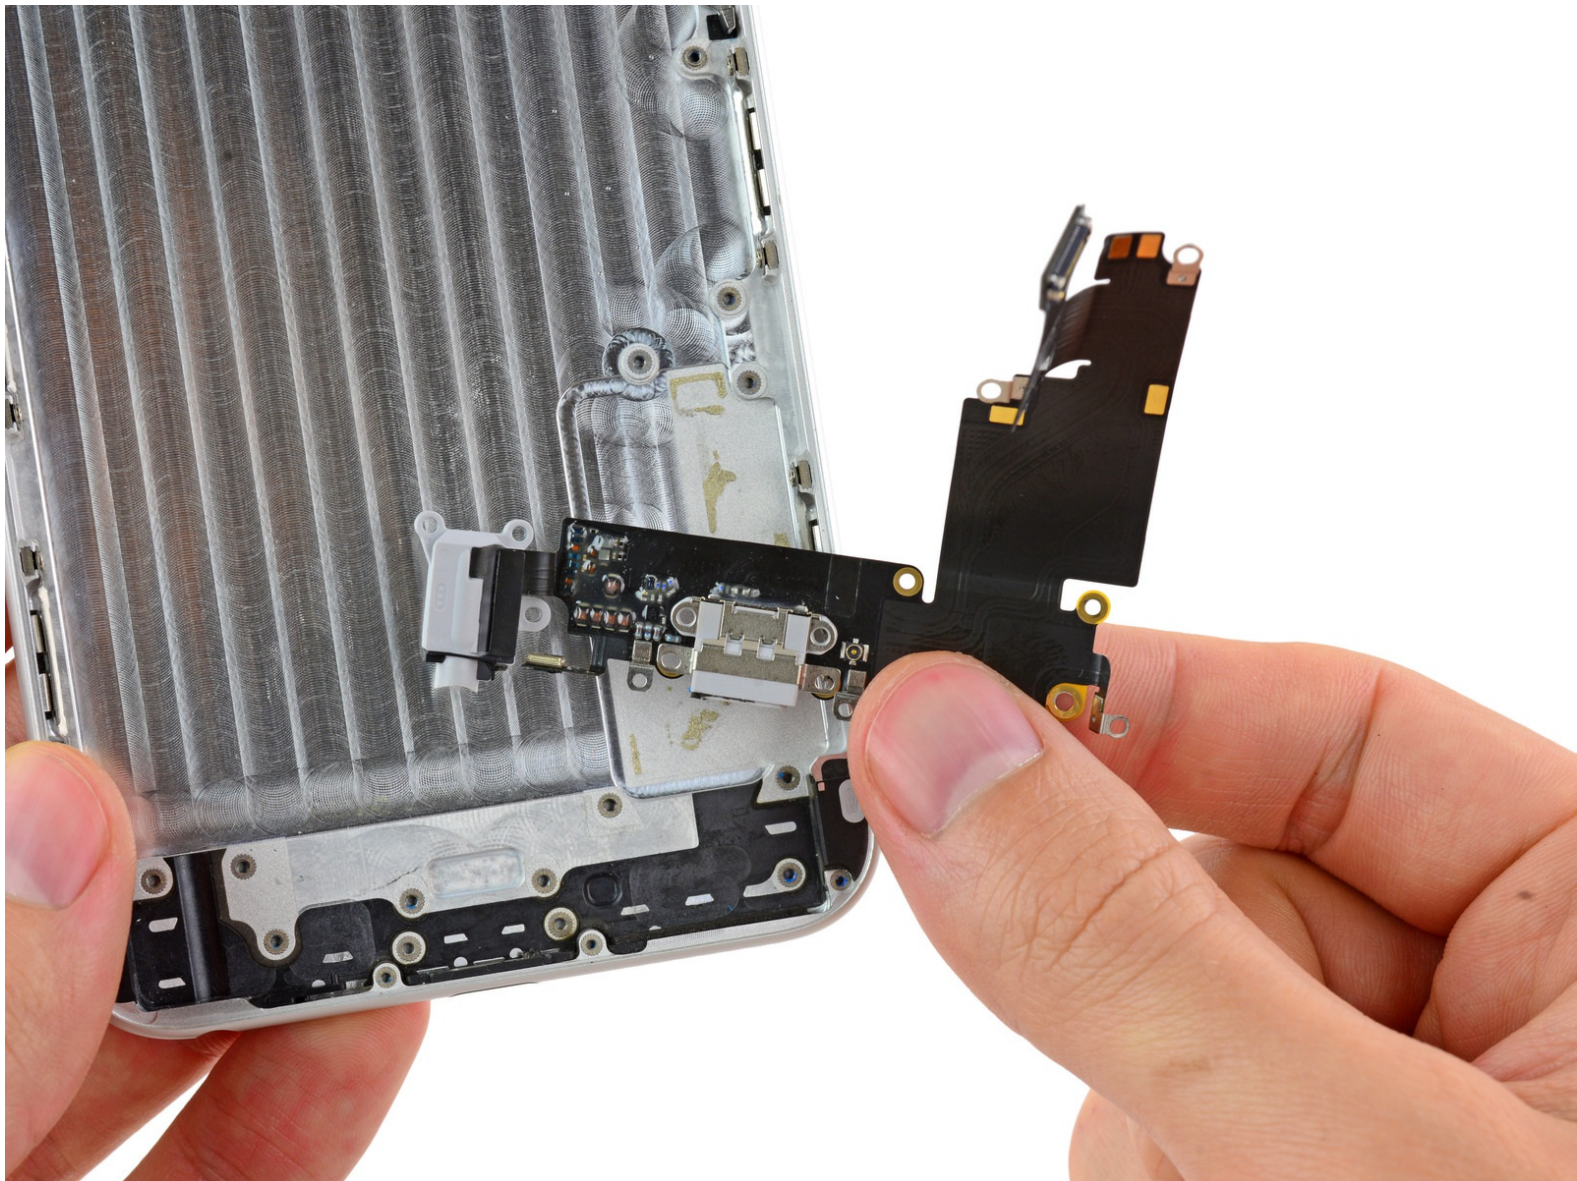

INTRODUCTION

Prereq only for rear case.



TOOLS:


- [iOpener](#) (1)
 - [iFixit Opening Picks set of 6](#) (1)
-

Step 1 — Lightning Connector and Headphone Jack Cable



- i** The next step requires peeling up the Lightning connector and headphone jack cable that is affixed to the inside of the rear case with mild adhesive. We highly recommend [using an iOpener](#) on the lower backside of the rear case to soften the adhesive.

Step 2

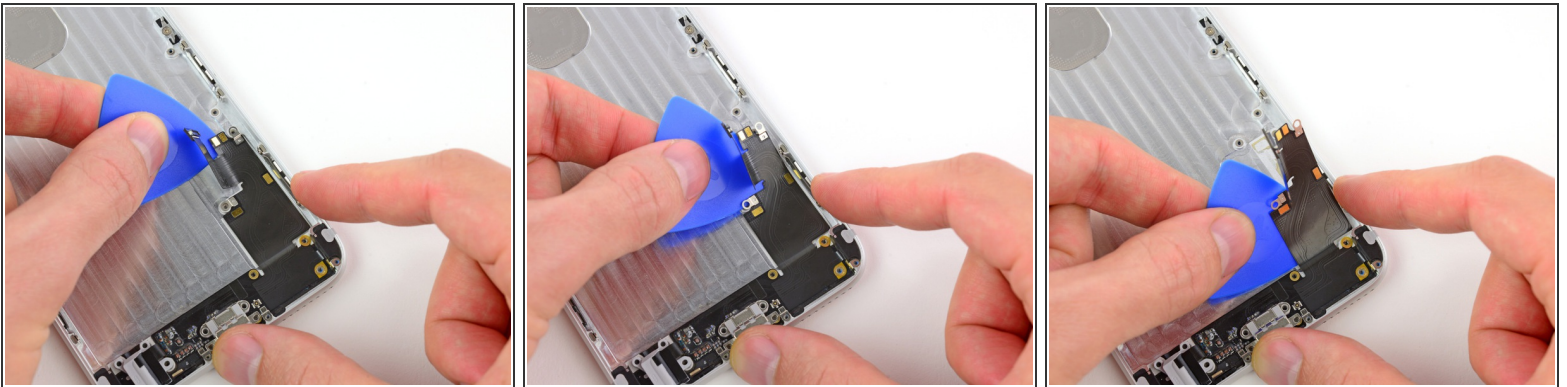

- Use an opening pick to slowly separate the Lightning connector and headphone jack cable from the rear case.
- i** Carefully work the pick down the right side of the Lightning connector and headphone jack cable, making sure to **stop** right as you hit the bottom.

Step 3




- Insert the pick underneath the right bottom corner of the Lightning connector and headphone jack cable.

Step 4



- Run the opening pick across the top of Lightning connector and headphone jack cable to loosen the adhesive securing it to the rear case.

Step 5

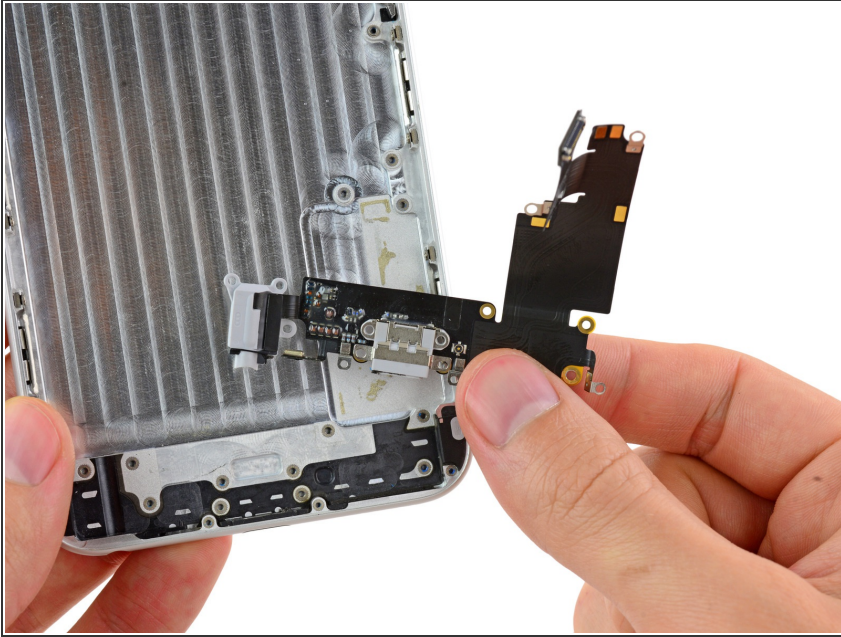

- Lift and remove the Lightning connector and headphone jack cable assembly out of the iPhone.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-23 08:07:06 AM.